



# 美格智能

## SRM810 模组

5G NR LGA

|                 |        |                 |      |       |                           |
|-----------------|--------|-----------------|------|-------|---------------------------|
| 5G              | SRM810 | !               | IoT/ | /eMBB | 5G Sub-6GHz               |
| LGA             | \$     | 30.0x41.0x2.7mm | *    | +     | V510                      |
| 15              | 5G     | SA              | NSA  | 7     | 13GPP Release             |
| 4G/3G网          |        |                 | 5G   |       |                           |
| SRM810          |        |                 |      | 7     | USB3.0 PCIe2.0 SDIO SPI A |
| UART ADC GPIO D | E      | eSIM7           | F    |       | Android Linux Windows     |
| H               |        |                 |      | K L   | eMBB                      |

### 主要优势：

- , ,4
- 

- USB3.0、PCIe2.0、SDIO 高 接口
- 3GPP Release 15 SA&NSA,向下 容4G/3G

# MeiG Smart SRM810模组

5G NR LGA

MEIG 美格


股票代码:0025

## 基本属性:

- : LGA
- : 30.0×41.0×2.7mm
- : <10g

## 模组速率:

- 5G NR Sub-6GHz:
  - MIMO 4\*4, 256QAM
  - Downlink up to 2.0Gbps
  - Uplink up to 900Mbps
- LTE:
  - Downlink up to 400Mbps
  - Uplink up to 150Mbps
- DC-HSPA+:
  - Downlink up to 42.4Mbps
  - Uplink up to 5.76Mbps

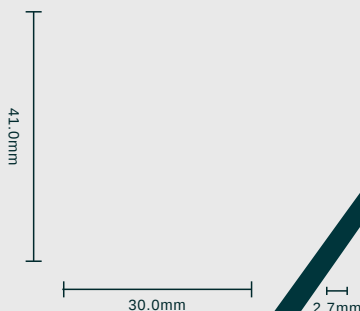

## 发射功率:

- Class 2 for N41/N78/N79
- Class 1 for LTE-FDD
- Class 3 for LTE-TDD

## 驱动&工具:

- : Windows 7, Windows 8, Windows 8.1, Windows 10, Linux, Android
- 
- USB FOTA

## 模组接口:

- 1xUSB 2.0/USB 3.0
- 1xPCIe Gen2.0
- 2xUART
- 1xSDIO 3.0
- 2xSIM卡接口(1.8 / 3.0V)
- eSIM
- / / MIMO 4Q
- 1xSPI
- 1xI2C
- GPIOs

## 环境温湿度特性:

- t 3 t tt : -30°C to 75°C
- : -40°C to 85°C
- : -40°C to 90°C
- : 5%~95%

## 认证信息:

- CCC\*/SRRC\*/CTA\*