


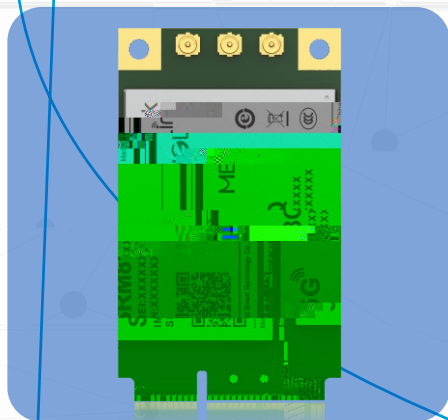

美格智能 SRM813Q模组

5G RedCap

MiniPCle

SRM813Q MiniPCle

IoT/eMBB

5G RedCap

主要优势：

5G RedCap

MiniPCle

PIN


5G LAN



5G NR



SA & LTE



MiniPCle



USB2.0 Port



-40 ~ -85



VoNR/VoLTE*

MeiG Smart SRM813Q模组

5G RedCap

MiniPCle

MEIG 美格

股票代码:002881

基本属性:

- : MiniPCle
- : 50.95×30.0×3.45mm
- : <10g

模组速率:

- 5G NR SA:
 - Downlink up to 220Mbps
 - Uplink up to 120Mbps
- LTE:
 - Downlink up to 200Mbps
 - Uplink up to 75Mbps

驱动&工具:

- : Windows 7, Windows 8, Windows 8.1, Windows 10, Linux, Android
-
- USB FOTA

网络协议:


- RNDIS/NDIS/IPV4/IPV6/TCP/UDP

模组接口:

- USB2.0 × 1
- PCM × 1
- UART x1
- GPIOs x1
- USIM 1.8V/3V
- 3
- 4G/5G x2
- GNSS x1

认证信息:

- CCC*/SRRC*/CTA*/CE*/FCC*

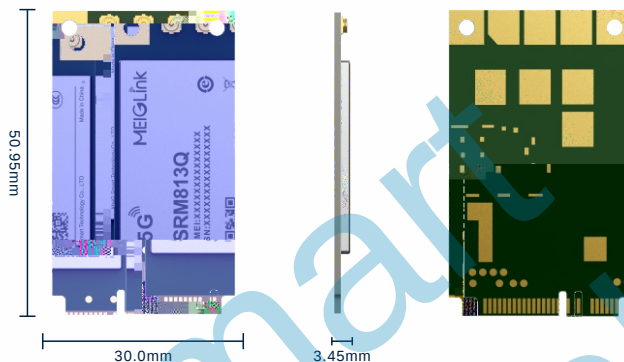

发射功率:

- Class 3 (23dBm±1.5dB) for 5G & LTE

环境温湿度特性:

- : -30°C to +75°C
- : -40°C to +85°C
- : -40°C to +90°C
- : 5%~95%

SRM813Q MiniPCle系列频段信息:

-CN:Region: China

5G NR:

FDD:N1/N5/N8/N28
TDD:N41/78

LTE:

FDD:B1/B3/B5/B8
TDD:B34/B38/B39/B40/B41

-NA:Region:North America

5G NR:

FDD:N2/N5/N7/N12/N13/N25/N66/N71
TDD:N38/N41/N48/N77/N78

LTE:

FDD:B2/B4/B5/B7/B12/B13/B17/B25/B26/B66/B71
TDD:B38/B41/B42/B43/B48

-EA:Region:Europe, Australia, Japan, Korea, Southeast Asia

5G NR:

FDD:N1/N3/N5/N7/N8/N20/N28
TDD:N38/N40/N41/N77/N78

LTE:

FDD:B1/B3/B5/B7/B8/B20/B28
TDD:B38/B40/B41/B42/B43

* 研发中

