

SLM770A

LTE Cat.4 LCC

SLM770A

— LTE Cat.4

150Mbps

50Mbps

3G 2G


SLM770A

ASR1803

SLM750

MeiG Smart SLM770A

LTE Cat.4 LCC

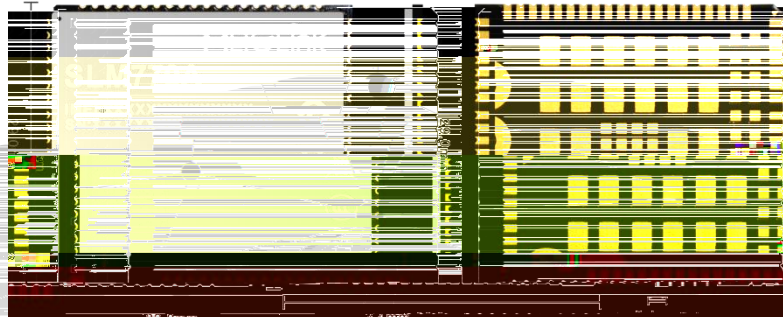

- ✓ LCC+LGA (144pin)
- ✓ 32.0 × 29.0 × 2.4mm
- ✓ <6g



- ✓ LTE-FDD (Cat.4): Max 150Mbps(DL)/50Mbps(UL)
- ✓ LTE-TDD (Cat.4): Max 130Mbps(DL)/35Mbps(UL)
- ✓ WCDMA: Max 384kbps(DL)/384kbps(UL)
- ✓ EDGE: Max 236.8kbps(DL)/236.8kbps(UL)
- ✓ GPRS: Max 85.6kbps(DL)/85.6kbps(UL)



- ✓ 10uA@
- ✓ <5mA@
- ✓ <30mA@
- ✓ 3.3V~4.2V 3.8V



&

- ✓ Window , Linux 2.6 , Android 4.0
- ✓ 工 — 工
- ✓ USB/FOTA



- ✓ PPP/ECM/TCP/UDP/DTLS/HTTP(S)/FTP(S)/MQTT(S)



- ✓ USB2.0 1
- ✓ SIM □(1.8 / 3.0V)
- ✓ PCM
- ✓ UART*2
- ✓ □ / ()/GNSS()



-40 ° C~+85 ° C -40 ~-30 +75 ~85



-45 ° C ~ +90 ° C



5%~95%



- ✓ GSM850/900 33±2dBm, GSM1800/1900 30±2dBm, WCDMA/HSPA 23+1/-3dBm, LTE-TDD 23±2.7dBm, LTE-FDD 23±2.7dBm



CCC/CTA/SRRC/CE/RCM



SLM770A

			GNSS
SLM770A-CA	LTE-FDD:B1/B3/B5/B8 LTE-TDD:B34/B38/B39/B40/B41 WCDMA:B1/B8 GSM:900/1800		
SLM770A-CB	LTE-FDD:B1/B3/B5/B8 LTE-TDD:B34/B38/B39/B40/B41 WCDMA:B1/B8 GSM:900/1800		支
SLM770A-CC	LTE-FDD:B1/B3/B5/B8 LTE-TDD:B34/B38/B39/B40/B41 WCDMA:B1/B8 GSM:900/1800	支	支
SLM770A-CE	LTE-FDD:B1/B3/B5/B7/B8/B20/B28 LTE-TDD:B38/B40/B41 WCDMA:B1/B8 GSM:900/1800		
SLM770A-EU	LTE-FDD:B1/B3/B7/B8/B20 LTE-TDD:B38 WCDMA:B1/B8 GSM:900/1800		
SLM770A-SA	LTE FDD:B1/2/3/4/5/7/8/28/66 LTE TDD:B40 WCDMA:B1/2/4/5/8 GSM:850/900/1800/1900		

