




A Global Leading IoT Terminals And Wireless Data Solutions Provider

MeiG-SLM927

Smart LTE

Wi-Fi ax ready & BT 5.1


- ✓
- ✓
- ✓
- ✓
- ✓
- ✓

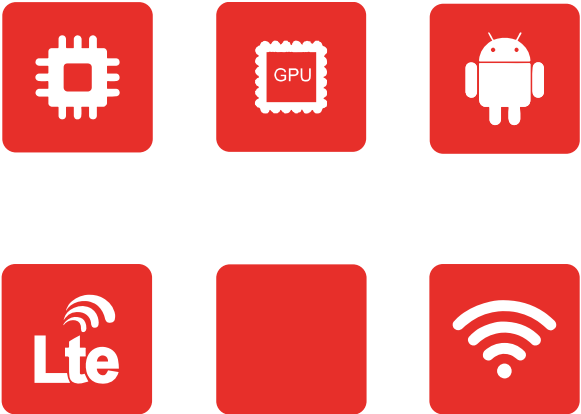

MeiG-SLM927

Smart LTE

WiFi/4G ready



SLM927-EAU			
GSM: GSM850/EGSM900/PCS1900/DCS1800			
WCDMA: B1/ 2/ 5/ 8			
FDD-LTE: B1/ 3/ 5/ 7/ 8/ 20/ 28	2x	1x GNSS	1x Wi-Fi&BT
TDD-LTE: B38/ 40/ 41(2496-2690MHz)			
SLM927-CN	I		
GSM: GSM/GPRS/EDGE EGSM900/DCS1800			
WCDMA: B / 8			
FDD-LTE: B1/ 3/ 5/ 8			
TDD-LTE:			
B34/ 38/ 39/ 40/ 41(2535-2655MHz)			
SLM927-JP			
GSM: GSM/GPRS/EDGE EGSM900/DCS1800			
WCDMA: B1/ 3/ 6/ 8/ 19			
FDD-LTE: B1/ 3/ 8/ 18/ 19/ 26			
FDD-LTE: B41	WIFI	2.4G/5G, 802.11 a/b/g/n/ac/ax ready	
		BT5.1	
SLM927-A*	GNSS	GPS/GLONASS/BeiDou	
WCDMA: B2/4/5			
FDD-LTE: B2/ 4/ 5/ 7/ 12/ 13/ 14/ 17/	USB		
25/ 26/ 66/ 71			
TDD-LTE: B41(2496-2690MHz)			
VoLTE	SRVCC/CSFB		
24-bit/192kHz			
Decode 1080p@60fps HEVC/H.264/H.265/VP9			
Encode 1080p@60fps HEVC/H.264/H.265			
Concurrency 1080p@30fps D + 1080p@30fps E			
I2C	C		
3x 4-lane MIPI_CSI	*		
3x ISP			
13 + 13 + 5 MP@30fps ZSL			
16 + 16MP@30fps or 25 + 5MP@30fps ZSL			
: 32MP@30fps ZSL 64M@30fps non-ZSL			